




TREMproof® FBM SEALED TAPE

SINGLE SIDED PRESSURE SENSITIVE ADHESIVE SEALED TAPE

DESCRIPTION

TREMproof FBM Sealed Tapes Single Sided is specially formulated reinforced pressure sensitive tape. The tape has a layers of pressure sensitive adhesive which bond respectively to the sand and HDPE surface. The specially developed adhesive layers work together to form a continuous and integral seal to the structure. The structure of TREMproof FBM Sealed Tapes Single Sided is as follows:

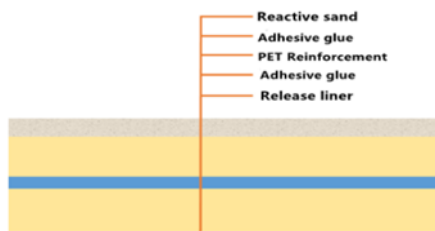

SCOPE OF WORKS

- The TREMproof FBM Sealed Tape Single Sided is a 120mm wide tape. It is recommended to reinforce overlaps with TREMproof FBM Sealed Tape Single Sided in critical locations such as horizontal-vertical interface installations, particularly in high-temperature climates country.
- Repair works on the damaged TREMproof FBM membrane can be completed by patching it with a piece of TREMproof FBM extending at least 100mm in all directions, adhered using TREMproof FBM Sealed Tapes Double Sided and reinforced with TREMproof FBM Sealed Tapes Single Sided on the sides.

INSTALLATION

After applying the TREMproof FBM Sealed Tape, use heavy hand pressure or a hand roller to maximize adhesion.

It is recommended that concrete be poured within 56 days (42 days in hot climates) of application of the tape. The concrete must be placed carefully and consolidated properly to avoid damage to the membrane. Never use a sharp object to consolidate the concrete. Provide temporary protection from concrete over splash for areas of the tape that are adjacent to a concrete pour.

PACKAGING

TREMproof FBM Sealed Tape Single Sided:
Overall Thickness: 0.8mm
Width: 120mm
Length: 20m/roll

WARRANTY

Tremco warrants its Products to be free of defects in materials but makes no warranty as to appearance or colour. Since methods of application and on-site conditions are beyond our control and can affect performance. Tremco makes no other warranty, expressed or implied, including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE, with respect to Tremco Membranes. Tremco's sole obligation shall be, at its option, to replace, or refund the purchase of the quantity or Tremco Membranes proved to be defective and Tremco shall not be liable for any loss or damage.

PROPERTY	TEST METHOD	TYPICAL VALUES
Tape Thickness	NA	0.8mm
Width	NA	120mm
Length	NA	20m
Adhesive Shear State	Q/SDKS073-2017	> 4N/mm
Peel Strength (to membrane HDEP surface)	Q/SDKS073-2017	> 0.8N/mm
Peel Strength (to membrane Sand finish surface)	Q/SDKS073-2017	> 0.8N/mm
Low Temperature Flexible (no crack)	Q/SDKS073-2017	-25 °C
Heat Resistance (No displacement, runny, dripping)	Q/SDKS073-2017	80 °C
Continuous Viscosity	Q/SDKS073-2017	> 15 min

To find your local office address and contact details, visit

www.tremcocpg-asiapacific.com